

U7FTG80LR

FRY-TOP A GAS SU MOBILE APERTO

GAS FRY-TOP ON OPEN-FRONTED UNIT



Caratteristiche Features

| Piastra di cottura realizzata in speciale acciaio levigato di grosso spessore | Cassetto raccogli grassi estraibile | Comandi sdoppiati per il riscaldamento differenziato della piastra | Bruciatori in acciaio inox a fiamma stabilizzata | Regolazione della temperatura da 100° a 300°C mediante rubinetto termostato con sicurezza e termocoppia | Accensione elettronica a pila del pilota | Pannello comandi facilmente estraibile per facilitare le operazioni di pulizia e manutenzione | Piedini in acciaio inox regolabili in altezza

| *Cooking plate in special thick honed steel | Removable fat collecting drawer | Dual control for the differentiated heating of the plate | Burners in stainless steel with stabilized flame | Temperature regulation from 100°C to 300°C by means of thermostatic tap with safety valve and thermocouple | Electronic battery pilot ignition | Control panel which can be quickly removed for easy cleaning and maintenance | Adjustable AISI 304 stainless steel feet*



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA GAS KW
GAS POWER KW



VOLUME m³



PESO Kg
WEIGHT Kg



ALLACCIAMENTO GAS
GAS CONNECTION

U7FTG80LR





800x730x900

13.8

0,9

114

Ø 1/2"

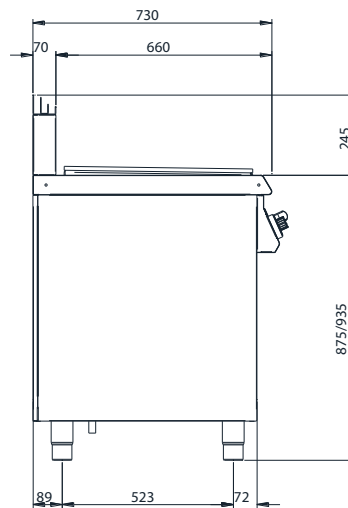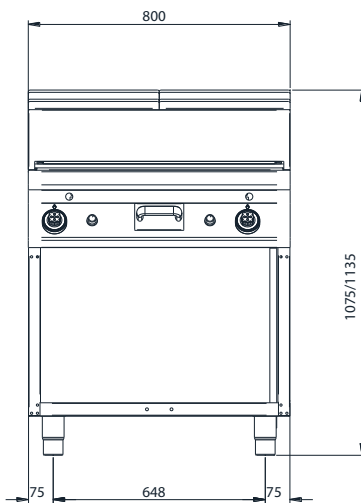

G = Gas Ø 1/2"